



Blue (/52) TL/TL-D

TL 20W/52 SLV/25

By emitting light almost entirely within the 400 to 500 nm bandwidth and peaking at 450 nm, Philips TL/TL-D color 52 lamps have no radiation from the short wave UVB. waveband. They are therefore suitable to be used in systems for applications such as Agriculture and Neonatal Jaundice Phototherapy

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take them to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Photobiological safety – IEC 62471 - Risk Group 2. CAUTION - Possibly hazardous optical radiation emitted from these products.


Product data

General Information		Controls and Dimming	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Dimmable	No
Life to 50% Failures (Nom)	9,000 hour(s)		
Useful Life (Nom)	2,000 hour(s)		
Light Technical		Mechanical and Housing	
Color Code	52	Bulb Shape	T38
Luminous Flux	318 lm		
Chromaticity Coordinate X (Nom)	154		
Chromaticity Coordinate Y (Nom)	69		
Operating and Electrical		Approval and Application	
Power Consumption	19.3 W	Mercury (Hg) Content (Nom)	8.0 mg
Lamp Current (Nom)	0.36 A		
Voltage (Nom)	59 V		
Voltage (Nom)	59 V		
Product Data			
Order product name	TL 20W/52 SLV/25		
Full product name	TL 20W/52 SLV/25		
Full product code	871150064302540		
Order code	928003505203		
Material Nr. (12NC)	928003505203		
Numerator - Quantity Per Pack	1		
EAN/UPC - Product/Case	8711500643025		

Blue (/52) TL/TL-D


Numerator - Packs per outer box	25
EAN/UPC - Case	8711500643032

Dimensional drawing

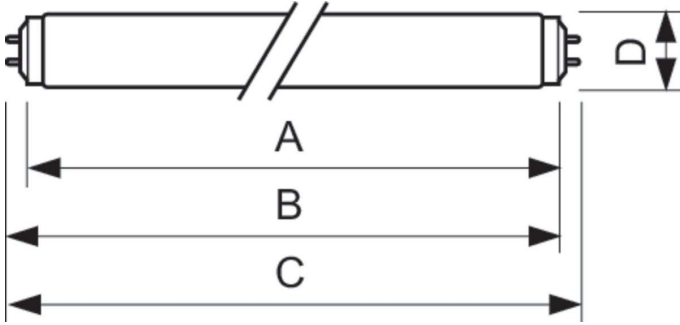

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL 20W/52 SLV/25	40.5 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

Photometric data

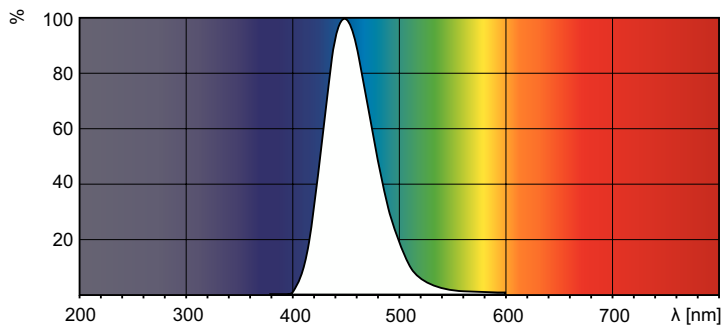

Spectral Power Distribution Colour - TL 20W/52 SLV/25

