



MSR Hot Restrike

MSR 400 HR 1CT/4

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Operating and Electrical	
Cap-Base	GZZ9.5	Power Consumption	400 W
Operating Position	UNIVERSAL [Any or Universal (U)]	Lamp Current (Nom)	7 A
Life to 50% Failures (Nom)	1,000 hour(s)		
Light Technical		Controls and Dimming	
Color Code	- [Not Specified]	Dimmable	Yes
Luminous Flux (Min)	28,080 lm		
Luminous Flux	31,200 lm	Product Data	
Chromaticity Coordinate X (Nom)	326	Order product name	MSR 400 HR 1CT/4
Chromaticity Coordinate Y (Nom)	321	Full product name	MSR 400 HR 1CT/4
Correlated Color Temperature (Nom)	5830 K	Full product code	871829122796000
Luminous Efficacy (rated) (Nom)	78 lm/W	Order code	928050205115
Color rendering index (CRI)	92	Material Nr. (12NC)	928050205115
Arc Length O (Nom)	6.0 mm	Numerator - Quantity Per Pack	1
		EAN/UPC - Product/Case	8718291227960
		Numerator - Packs per outer box	4

MSR Hot Restrike

EAN/UPC - Case


8718291227977

Dimensional drawing



Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSR 400	23 mm	6.0	59 mm	61 mm	60	110 mm	24 mm	23.5	23 mm
HR 1CT/4		mm			mm			mm	

Photometric data

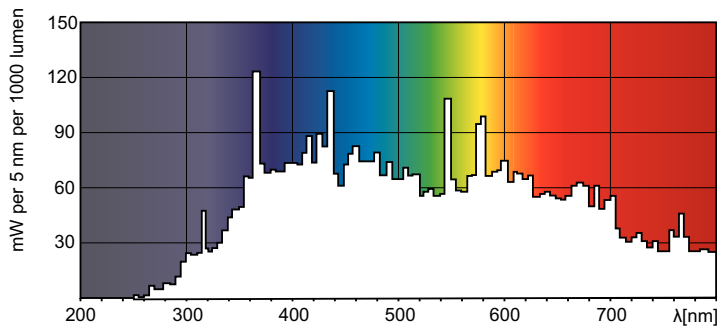

Spectral Power Distribution Colour - MSR 400 HR 1CT/4

