



MASTERColour CDM-T



MASTERColour CDM-T 150W/942 G12 1CT

Range of single-ended, compact, high-efficiency, discharge lamps with a stable colour over lifetime and a crisp, sparkling light

Warnings and Safety

- · Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- $\boldsymbol{\cdot}$ The luminaire must be able to contain hot lamp parts if the lamp ruptures
- \cdot Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Lamps may use electronic or electromagnetic control gear, except 35W/942 and 20W lamps, which must use electronic control gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

| General Information | | | | | |
|------------------------------------|----------------------------------|--|--|--|--|
| Cap-Base | G12 | | | | |
| Operating Position | UNIVERSAL [Any or Universal (U)] | | | | |
| Flux measurement reference | Sphere | | | | |
| Life to 50% Failures (Nom) | 12,000 hour(s) | | | | |
| | | | | | |
| Light Technical | | | | | |
| Color Code | 942 [CCT of 4200K] | | | | |
| Luminous Flux | 12,100 lm | | | | |
| Color Designation | Cool White (CW) | | | | |
| Chromaticity Coordinate X (Nom) | 0.371 | | | | |
| Chromaticity Coordinate Y (Nom) | 0.366 | | | | |
| Correlated Color Temperature (Nom) | 4200 K | | | | |
| | | | | | |

| Luminous Efficacy (rated) (Nom) | 82 lm/W |
|---------------------------------|---------|
| Color rendering index (CRI) | 96 |
| Arc Length O (Nom) | 8 mm |
| | |
| Operating and Electrical | |
| Power Consumption | 150.1 W |
| Voltage (Nom) | 90 V |
| Voltage (Nom) | 90 V |
| | |
| Controls and Dimming | |
| Dimmable | No |
| | |


Datasheet, 2023, May 15 data subject to change

MASTERColour CDM-T

| Mechanical and Housing | |
|-------------------------------|--------------------------------|
| Bulb Finish | Clear |
| Bulb Shape | T19 |
| | |
| Approval and Application | |
| Energy Efficiency Class | G |
| Mercury (Hg) Content (Max) | 10.4 mg |
| Mercury (Hg) Content (Nom) | 10.4 mg |
| Energy Consumption kWh/1000 h | 151 kWh |
| EPREL Registration Number | 473338 |
| | |
| Product Data | |
| Order product name | MASTERC CDM-T 150W/942 G12 1CT |


| Full product name | MASTERColour CDM-T 150W/942 G12 1CT | | | |
|---------------------------------|-------------------------------------|--|--|--|
| Full product code | 871150020005115 | | | |
| Order code | 20005115 | | | |
| Material Nr. (12NC) | 928084605131 | | | |
| Numerator - Quantity Per Pack | 1 | | | |
| EAN/UPC - Product/Case | 8711500200051 | | | |
| Numerator - Packs per outer box | 12 | | | |
| EAN/UPC - Case | 8711500200068 | | | |
| | | | | |


Dimensional drawing




| Product | D (max) | D | 0 | L (min) | L (max) | L | C (max) |
|------------------|---------|-----------|------|---------|---------|-------|---------|
| MASTERC CDM-T | 20 mm | 0.75 inch | 8 mm | 55 mm | 57 mm | 56 mm | 110 mm |
| 150W/942 G12 1CT | | | | | | | |

Photometric data

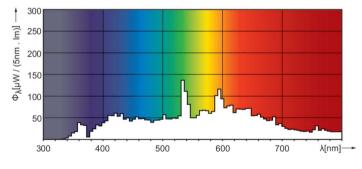







Spectral Power Distribution Colour - MASTERC CDM-T 150W/942 G12 1CT

Light Distribution Diagram - MASTERC CDM-T 150W/942 G12 1CT

MASTERColour CDM-T

Lifetime

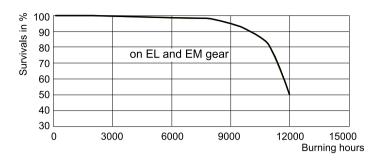

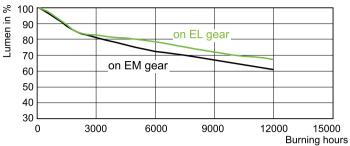

Life Expectancy Diagram - MASTERC CDM-T 150W/942 G12 1CT

Lumen Maintenance Diagram - MASTERC CDM-T 150W/942 G12 1CT

