



# Architectural MSA

## MSA 2500 DE UNP/1

The high luminous efficacy and optimal lamp filling of the double ended Architectural MSA lamps create high beam intensity and excellent color rendering. While the compact arc of the lamp allows efficient beam control and high intensity. Ideal to illuminate architecture of all types at night.

### Warnings and Safety


- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information		Lamp Current (Nom)	
Cap-Base	(P)SFC	22.5 A	
Operating Position	P15 [Parallel +/-15D or Horizontal(HOR)]	Controls and Dimming	
Life to 50% Failures (Nom)	2,500 hour(s)	Dimmable	No
Light Technical		Product Data	
Color Code	856	Order product name	MSA 2500 DE UNP/1
Luminous Flux	250,000 lm	Full product name	MSA 2500 DE UNP/1
Chromaticity Coordinate X (Nom)	330	Full product code	871150020208600
Chromaticity Coordinate Y (Nom)	360	Order code	928099405103
Correlated Color Temperature (Nom)	5600 K	Material Nr. (12NC)	928099405103
Luminous Efficacy (rated) (Nom)	100 lm/W	Numerator - Quantity Per Pack	1
Color rendering index (CRI)	88	EAN/UPC - Product/Case	8718291548300
Arc Length O (Nom)	25 mm	Numerator - Packs per outer box	1
Operating and Electrical		EAN/UPC - Case	8711500202086
Power Consumption	2,500 W		


# Architectural MSA

## Dimensional drawing

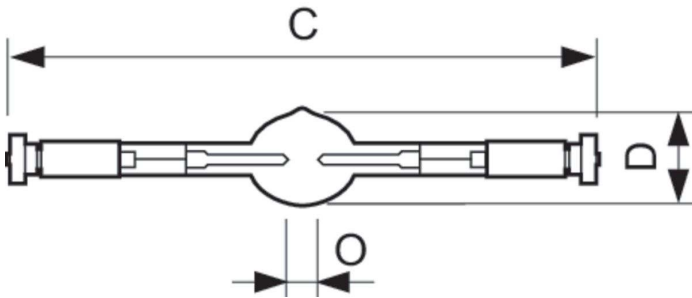

Product	D (max)	O	C (max)
MSA 2500 DE UNP/1	41 mm	25 mm	364 mm

## Photometric data

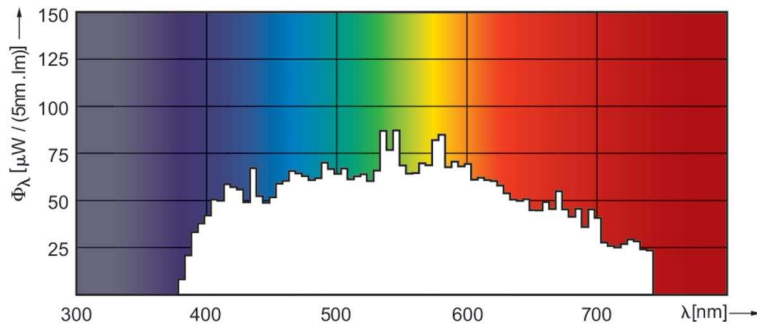

Spectral Power Distribution Colour - MSA 2500 DE UNP/1

